


## SPECIFICATIONS:

|                             |                               |
|-----------------------------|-------------------------------|
| Current Rating:             | 15A @ 125V AC, 7.5A @ 250V AC |
| Initial Contact Resistance: | 5 Meg ohm (Max.)              |
| Insulation Resistance:      | 100 Meg ohm (Min.)            |
| Dielectric Strength:        | 1000V AC for 1 minute         |
| Contact Material:           | Copper Alloy                  |
| Terminal Material:          | Copper Alloy                  |
| Terminal Type:              | .250" Quick Connect           |

| Part No.  | Type | Action |   |     | Actuator          |
|-----------|------|--------|---|-----|-------------------|
| 30-390    | SPST | ON     | - | OFF | Amber Nylon       |
| 30-395    | SPST | ON     | - | OFF | Red Nylon         |
| 30-16740* | SPST | ON     | - | OFF | Translucent Nylon |

\*30-16740 RATED 16A @ 125VAC, 10A @ 250VAC  
Neon Light @ 110V AC

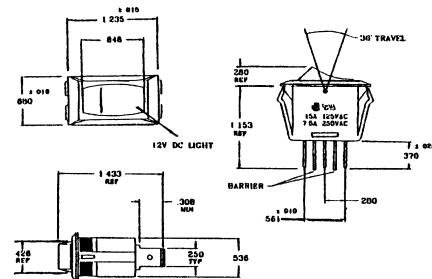

Mounting Hole: 1.125" x 0.550"




## SPECIFICATIONS:

|                             |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| Current Rating:             | 16A @ 125V AC, 12A @ 250V AC<br>3/4 HP @ 125-250V AC, 10A @ 14V DC |
| Initial Contact Resistance: | 5 Meg ohm (Max.)                                                   |
| Insulation Resistance:      | 100 Meg ohm (Min.)                                                 |
| Dielectric Strength:        | 1000V AC for 1 minute                                              |
| Contact Material:           | Copper Alloy                                                       |
| Terminal Material:          | Copper Alloy                                                       |
| Terminal Type:              | .250" Quick Connect                                                |

| Part No. | Type | Action |   |     | Actuator     |
|----------|------|--------|---|-----|--------------|
| 30-710   | SPST | ON     | - | OFF | Black Nylon  |
| 30-720   | SPDT | ON     | - | ON  | Black Nylon  |
| 30-730   | SPST | ON     | - | OFF | Green Nylon* |
| 30-740   | SPST | ON     | - | OFF | Amber Nylon* |

\*Lamp (is dependent) high intensity neon with 1/4 watt 22 K Ohm resistor, with 10,000 hours of life for 125 volts.

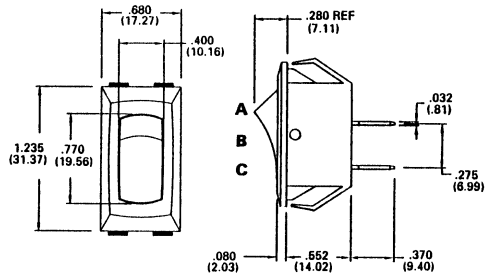

Mounting Hole: 1.125" x 0.550"



## SPECIFICATIONS:

|                            |                  |               |
|----------------------------|------------------|---------------|
| <b>ELECTRICAL RATINGS:</b> |                  |               |
| 15A                        | 125-250V AC T85  | UL E45221     |
| 1/2HP                      | 125V AC 1HP 250V | UL E45221     |
| 16A                        | 125-250V AC Res  | CSA LR10990   |
| 16 (4)A                    | 250V AC T85      | VDE 45152     |
| 20A                        | 28V DC           | Approvals N/A |

### MATERIALS:


|                       |               |
|-----------------------|---------------|
| Body:                 | Nylon 6.6     |
| Actuator Transparent: | Polycarbonate |
| Contact Gap:          | u Micro       |
| Contact Material:     | Silver Alloy  |

| Part No. | Type | Action |   |     | Actuator          |
|----------|------|--------|---|-----|-------------------|
| 30-060   | SPST | ON     | - | OFF | Red Lens*         |
| 30-069   | SPST | ON     | - | OFF | Red Translucent** |

\* Lamp Voltage 12V AC/DC Incandescent

\*\* Lamp Voltage 105-130V AC Neon

## LIGHTED STANDARD SIZE ROCKER SWITCHES

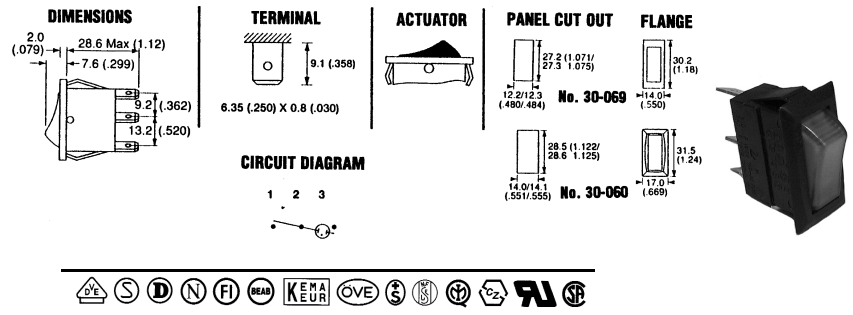

\* NOTE: User Note: The light bulb incorporated in this switch must be connected to 12 volts AC or DC and NOT to 125 volts. The 125 volt rating applies to switch contacts, NOT to the light.

## SPECIFICATIONS:

|                            |                  |               |
|----------------------------|------------------|---------------|
| <b>ELECTRICAL RATINGS:</b> |                  |               |
| 15A                        | 125-250V AC T85  | UL E45221     |
| 1/2HP                      | 125V AC 1HP 250V | UL E45221     |
| 16A                        | 125-250V AC Res  | CSA LR10990   |
| 16 (4)A                    | 250V AC T85      | VDE 45152     |
| 20A                        | 28V DC           | Approvals N/A |

### MATERIALS:

|                       |               |
|-----------------------|---------------|
| Body:                 | Nylon 6.6     |
| Actuator Transparent: | Polycarbonate |
| Contact Gap:          | u Micro       |
| Contact Material:     | Silver Alloy  |

| Part No. | Type | Action |   |     | Actuator    |
|----------|------|--------|---|-----|-------------|
| 30-550   | SPST | ON     | - | OFF | Red Lens*   |
| 30-552   | SPST | ON     | - | OFF | Green Lens* |
| 30-556   | SPST | ON     | - | OFF | Amber*      |

\* NOTE: User Note: The light bulb incorporated in this switch must be connected to 12 volts AC or DC and NOT to 125 volts. The 125 volt rating applies to switch contacts, NOT to the light.

## LIGHTED STANDARD SIZE SNAP-IN ROCKER SWITCHES

