


MULTI - CONTACT CONNECTORS

P.C. BOARD MOUNT DIP IC SOCKETS

FEATURES:


- 8, 14, 16, 18, 20, 24, 28 & 40 Contact available
- Tin Plated contact
- Industry standard spacing



SPECIFICATIONS:

Contact Resistance:	30m ohm max. at DC 100mA
Insulator Resistance:	1000m ohm min. at DC 500V
Current Rating:	1 Amp Dielectric Withstanding
Voltage:	AC 500V for 1 minute
Operating Temperature:	-55°C - +105°C
Contact:	Phosphor Bronze
Housing:	PBT & 30% Glass Fiber (UL 94V-0)

*NOTE: Metric dimensions in Parentheses					
Dimension					
Part No.	Position	A	B	C	D
No. 70-4608	8	.400 (10.16)	.300 (7.62)	.400 (10.16)	.300 (7.62)
No. 70-4614	14	.700 (17.78)	.600 (15.24)	.400 (10.16)	.300 (7.62)
No. 70-4616	16	.800 (20.32)	.700 (17.78)	.400 (10.16)	.300 (7.62)
No. 70-4618	18	.900 (22.86)	.800 (20.32)	.400 (10.16)	.300 (7.62)
No. 70-4620	20	1.000 (25.40)	.900 (22.86)	.400 (10.16)	.300 (7.62)
No. 70-4624	24	1.200 (30.48)	1.100 (27.94)	.700 (17.78)	.600 (15.24)
No. 70-4628	28	1.400 (35.56)	1.300 (33.02)	.700 (17.78)	.600 (15.24)
No. 70-4640	40	2.000 (50.80)	1.900 (48.26)	.700 (17.78)	.600 (15.24)

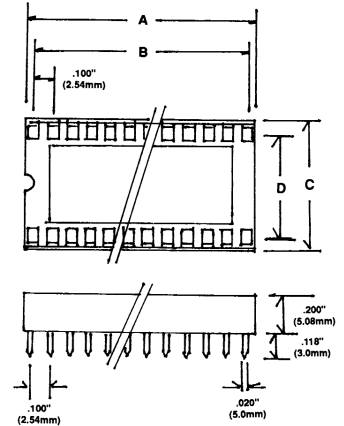

INSULATION DISPLACEMENT DIP CONNECTORS

FEATURES:

- 14, 16, 18, 20, 24, 28 & 40 contact available
- Mates with .050\" centered round conductor flat wire
- .100\" Contact Spacing
- Accepts 28-30 ga. wire
- Fits all standard DIP Sockets or direct soldering to P.C. board

SPECIFICATIONS:

Contact Resistance:	30m ohm max. at DC 100mA
Insulator Resistance:	1000m ohm min. at DC 500V
Current Rating:	1 Amp Dielectric Withstanding
Voltage:	AC 500V for 1 minute
Operating Temperature:	-55°C - +105°C
Contact:	Phosphor Bronze
Housing:	PBT & 30% Glass Fiber (UL 94V-0)

*NOTE: Metric dimensions in Parentheses					
Dimension					
Part No.	Position	A	B	C	D
No. 70-4714	14	.895 (22.74)	.600 (15.24)	.417 (10.60)	.300 (7.62)
No. 70-4716	16	.989 (25.12)	.700 (17.78)	.417 (10.60)	.300 (7.62)
No. 70-4718	18	1.052 (26.74)	.800 (20.32)	.417 (10.60)	.300 (7.62)
No. 70-4720	20	1.170 (29.74)	.900 (22.86)	.417 (10.60)	.300 (7.62)
No. 70-4724	24	1.378 (35.00)	1.100 (27.94)	.716 (18.18)	.600 (15.24)
No. 70-4728	28	1.579 (40.10)	1.260 (32.02)	.716 (18.18)	.600 (15.24)
No. 70-4740	40	2.178 (55.34)	1.900 (48.26)	.716 (18.18)	.600 (15.24)

